




# Planetary Gear Type Industrial Peristaltic Pump

Model No.: J025

Flow Rate: 1.0-28.15L/min



Roller Components

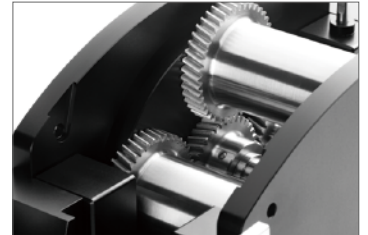

DZ45-I  
tubing with connector



DZ45-II  
continuous tubing

## Product Introduction

J025 peristaltic pump head use aluminum alloy shell, 304 stainless steel rollers, long lifetime, corrosion resistance; big flow rate, high pressure, suitable for transfer high viscosity and high lift liquid; Driven by AC motor, can use frequency adapter to adjust speed and flow rate, can also connect with PLC, IPC and computers.

## Typical Application

Bio- medical, Chemical industry, Environmental protection



Pump Head



DZ45 Pump Head

Drive	Power Supply	Power	Speed (rpm)	Tubing		Flow Rate (L/min)	Pressure (Mpa)		Weight
				Size	ID*Wall thickness		Continuous	Intermittent	
J025	AC380V/ AC220V	370W	37.5-350	88#	12.7*4.8	1.0-12.5	0.25	0.3	30kg
			37.5-270	92#	25.4*4.8	3.68-28.15			

Dimension Drawing(Unit:mm)

