

## Explosion Proof Peristaltic Pump


EXP600/YZ35



### Features

- Driven by explosion-proof motor, the power is strong.
- Stepless speed regulation, reversible inversion.
- IP rate: IP55
- Explosion-proof grade: ExdIIBT4 Gb
- Suitable for inflammable and explosive industrial sites.

### Dimension Drawing (Unit: mm)

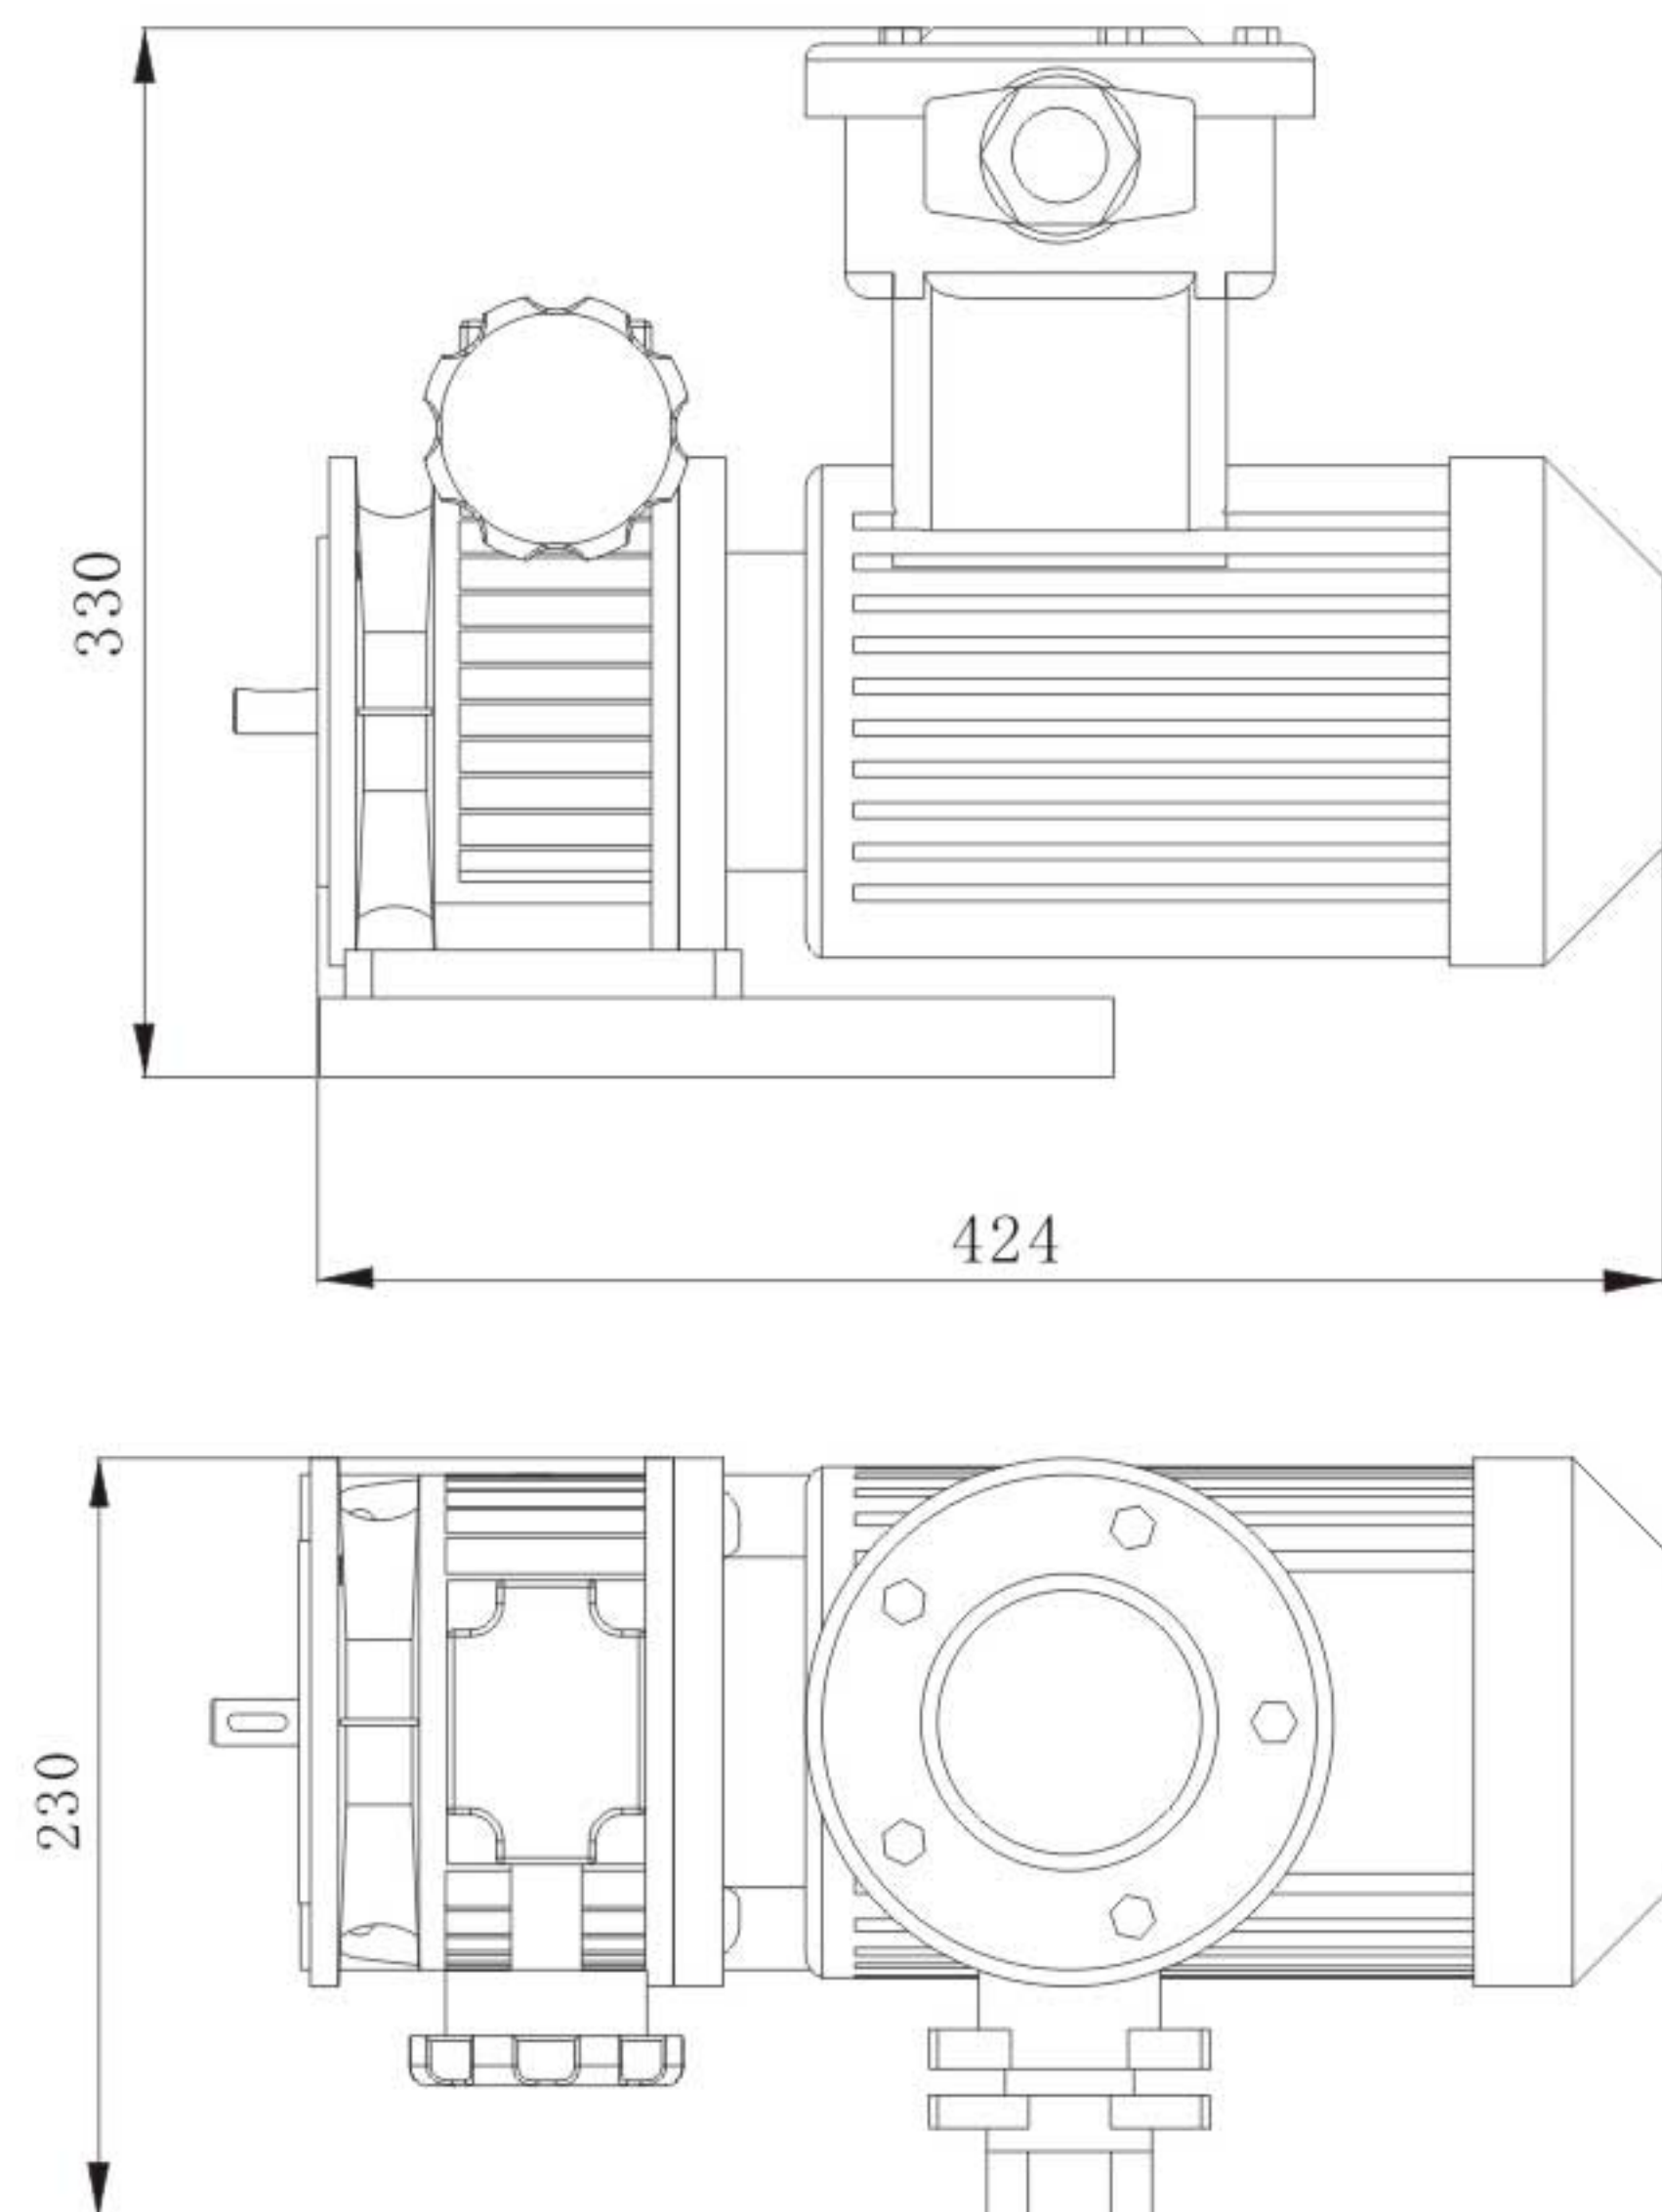

## Explosion Proof Peristaltic Pump

Stainless steel housing      Frequency converter



### Technical Specifications

Speed range	180-600 rpm	Condition temperature	0~40°C
Speed control	Manual stepless speed regulation/ Inverter speed regulation	Relative humidity	<80%
		Explosion-proof grade	ExdIIBT4 Gb, ExdIICT4
Voltage	3 phase 380V(standard)/	IP rate	IP55
	3 phase 220V(optional)	Drive dimension (L×W×H)	424×230×330 (mm)
Drive weight	30 kg		

### Product Composition and Flow Rate Range

Drive	Speed	Pump Head	Tubing Size	Flow Rate (mL/min)
EXP600	180-600rpm	YZ1515x	13", 14", 19", 16", 25", 17", 18"	12.6~2280
		YZ2515x	15", 24"	306~1740
		YZ35	26", 73", 82"	1242~12000
		DZ25-3L	15", 24", 35", 36"	379.8~3600
		DZ25-6L	15", 24", 35", 36"	540~6000
		SN15	14", 16"	43.2~528
		SN25	24"	450~1500

