

# Accessories




### Windshield

made of stainless steel, for a stable flame under conditions of strong air flow  
**Art.-No. 8.000.600**



### Spray protector

for more safety when handling with pathogenic material  
**Art.-No. 6.000.200**

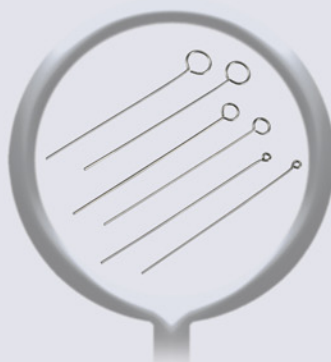

### Inoculation loops, wire Ø 0.6 mm


Special stainless steel  
Ø 1 mm: **Art.-No. 6.000.371**  
Ø 3 mm: **Art.-No. 6.000.373**  
Ø 5 mm: **Art.-No. 6.000.375**

Platinum / Iridium  
Ø 1 mm: **Art.-No. 6.000.381**  
Ø 3 mm: **Art.-No. 6.000.383**  
Ø 5 mm: **Art.-No. 6.000.385**



### Inoculation loop holder

made of stainless steel, with sleeve nut, for inoculation loops with wire Ø 0.6 - 1 mm  
Length 245 mm: **Art.-No. 6.000.360**  
Length 215 mm: **Art.-No. 6.000.365**

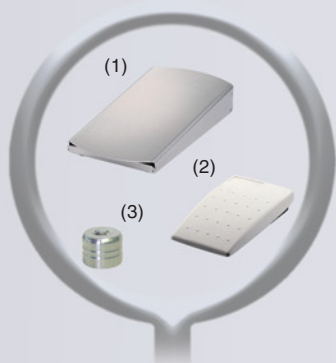

### (1) Foot pedal

made of stainless steel, cable length 3.0 m **Art.-No. 6.000.402**

### (2) Foot pedal Mini

made of plastic, cable length 3.0 m **Art.-No. 6.000.403**

### (3) Benchtop switch

made of stainless steel, cable length 0.4 m **Art.-No. 6.000.405**



### Foot pedal radio set RF Stick

cable-free foot pedal operation, simply connect the RF-Stick and control the gas burner with wireless radio technology (available in EU countries only)

for all Fuego SCS and Gasprofi 1 SCS micro (as of Serial-No. 05...)  
**Art.-No. 8.000.404-RF**




### External IR - motion sensor

touch-free flame activation, made of stainless steel, cable length 0.4 m  
**Art.-No. 6.000.406**



### Tray, mobile

made of stainless steel, 5 places  
**Art.-No. 6.000.320**

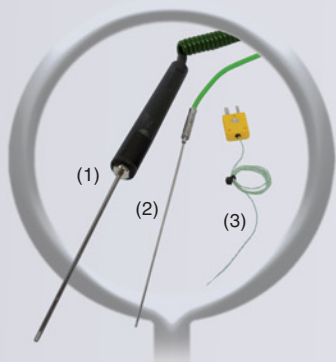

### Thermocouple type K

(only Fuego SCS & Fuego SCS pro, as of Serial-No. 12Zxxxxx)

(1) Immersion sensor Ø 3 mm with handle, sensor length 130 mm, helix connection cable  
**Art.-No. 8.200.240**


(2) Immersion sensor Ø 1.5 mm, sensor length 150 mm, bendable, cable length 2 m  
**Art.-No. 8.200.241**

(3) Air sensor, PTFE insulated, cable length 1 m  
**Art.-No. 8.200.242**



### Measuring adapter for thermocouples, type K,

temperature range from +35°C to +350°C (only Fuego SCS & Fuego SCS pro, as of Serial-No. 12Zxxxxx)  
**Art.-No. 8.200.230**

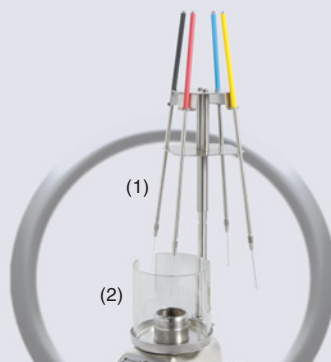

### (1) Ecoloop

manual carousel for flame sterilizing of up to 4 inoculation loops, to screw on (Fuego SCS - Series only)  
**Art.-No. 8.000.350**

### (2) Spray protector for Ecoloop / Autoloop

for more safety when handling pathogenic material  
**Art.-No. 6.000.210**



### Tray

for right, left or rear side for Fuego SCS - Series **Art.-No. 8.000.340**  
for Gasprofi 1 SCS micro **Art.-No. 6.000.341**



### Burner head

made of stainless steel, double length for better heating of Erlenmeyer flasks, decomposable, dishwasher-proof and autoclavable  
**Art.-No. 8.100.091**



# Fuego<sup>SCS</sup> / gasprofi 1<sup>SCS</sup> micro

## Accessories




**Safety adapter**  
with integrated pressure regulator  
for gas cartridges **CV 360**  
**Art.-No. 8.000.700**  
for gas cartridges **Express 444**  
**Art.-No. 6.000.750**



**Safety adapter C 206**  
with integrated pressure  
regulator, gas leak protection  
and DVGW-tubing (0.5 m) for  
gas cartridges **C 206**  
**Art.-No. 6.000.800**



**Safety adapter CV**  
with integrated pressure regulator,  
gas leak protection, DVGW-tubing  
(0.5 m) and stainless steel stand  
for gas cartridges  
**CV 470 / 270: Art.-No. 6.000.850**  
**CV 300: Art.-No. 6.000.831**

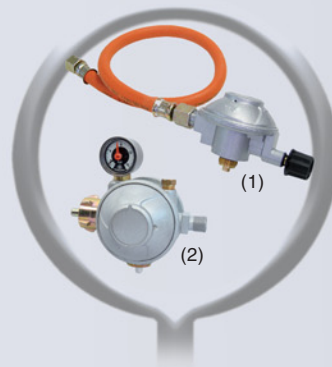

**(1) Safety adapter R**  
with pressure regulator and DVGW-  
tubing (0.5 m) for gas cylinders  
**R 901 / R 904 / R 907**  
**Art.-No. 6.000.840**  
**(2) DVGW low press. regulator**  
DIN 4811-4, for household liquid  
gas installation, with overpress.-,  
temperature- fuse & manometer,  
for gas bottles up to 14 kg  
**Art.-No. 6.000.150**




**Safety adapter CP250**  
with integrated pressure regulator  
and DVGW-tubing (0.5 m) for  
gas cartridges **CP 250**  
**Art.-No. 6.000.820**



**Safety adapter CG 1750**  
with integrated pressure  
regulator, DVGW-tubing (0.5 m)  
and stainless steel stand for gas  
cartridges with 7/16" UNEF-  
thread, e.g. **CG 1750**  
**Art.-No. 6.000.810**



**Quadrupod**  
155 x 155 x 210 mm  
(L x W x H)  
**Art.-No. 6.000.930**

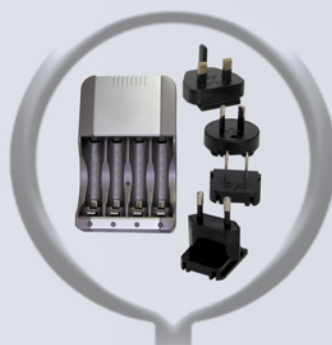


**External charging station**  
for rechargeable batteries:  
Mignon (AA), NiMH  
(Fuego SCS pro only)  
**Art.-No. 8.000.950**



**Gas cartridges Propane / Butane**  
with valve  
**CV 360, 52 g Art.-No. 6.000.180**  
**CG 1750, 170 g Art.-No. 6.000.181**  
**Express 444, 60 g Art.-No. 6.000.182**  
**CV 470, 450 g Art.-No. 6.000.185**  
**CP 250, 250 g Art.-No. 6.000.192**  
**CV 300, 240 g Art.-No. 6.000.183**  
**CV 270, 230 g Art.-No. 6.000.184**

**Gas cartridges Propane / Butane**  
without valve  
**C 206, 190 g Art.-No. 6.000.190**

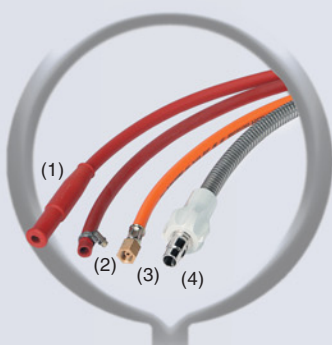

**DVGW-Safety tubing**  
**(1) for push-fit connection (0.5 m) Art.-No. 6.000.102**  
**(2) for push-fit connection, with 2 tubing clips (0.5 m) Art.-No. 6.000.101**  
**(3) for threaded connection (0.5 m) Art.-No. 6.000.112**  
**(4) for gas socket connection (0.5 m) Art.-No. 6.000.122**  
other length on demand



**Tubing deflector**  
for front side gas  
connection  
**Art.-No. 6.000.124**



**90° connection**  
for sidewise tubing  
connection  
**Art.-No. 6.000.123**



DIN 30665-1



**WLD-TEC** GmbH



**Sales Department:**  
Spandauer Weg 1  
D-37085 Göttingen  
Phone: +49 (0)551 / 793789  
Fax: +49 (0)551 / 793707

**Production & Service:**  
Halle-Kasseler-Straße 49  
D-37318 Arenshausen  
Phone: +49 (0)36081 / 68940  
Fax: +49 (0)36081 / 68942

**Email: sales@wld-tec.com • Internet: http://www.wld-tec.com**

(07/11, 8.999.102) Specifications subject to change without notice