

MULTIPLE STIRRERS WITH INTERNAL CONTROL

Designed for reliable mass screenings as well as chemical, biotechnical and medical applications of all kinds, developed for the hard daily lab use and uncompromising continuous operation.

MIX 4 MS

Ultra-flat magnetic stirrer with 4 individually controlled stirring positions, suitable for 4 x 2,000 ml Erlenmeyer flasks.

- ⌘ 4 independent stirring positions
- ⌘ Wear- and maintenance-free
- ⌘ Space-saving
- ⌘ Outstanding long-life quality
- ⌘ Developed and made in Germany

magnetic motion



Type	MIX 4 MS
Stirring points	4
Stirring point distance	140 mm
Stirring volume/stirring point	1 - 3,000 ml
Speed range	100 - 2,000 rpm
Stirring power (max.)	28 W (4 x 7 W)
Power setting	-
Material housing	stainless steel
Permitted operation conditions	-10 °C up to +50 °C (at 80% humidity)
Electrical data	100-240 V / 50-60 Hz / 1.5 A
Dimensions (WxDxH)	245 x 425 x 38 mm
Protection category	IP65
Weight (gross)	approx. 9.1 kg
Order no.	30404

3 years warranty on material and manufacturing.
We reserve the right to make technical alterations. We do not assume liability for errors in printing or typing.

Powerful 4 stirring positions, 100% maintenance-free and wear-free by inductive 2mag-Magnetic-Drive concept, power reserves up to 3,000 ml per stirring point, individual and independent speed setting for each stirring drive (Master-Slave-Technology), also ON/OFF function, synchronous speed mode for all positions, extremely wide speed range of 100 to 2,000 rpm, jerk-free stirring even at low speeds.

Clear digital display for settings of stirrer speeds, SoftStart procedure for reliable catching/centering and safe acceleration of the stirring bar, automatic memory function to save the last settings, outstanding long-life cycle of the hermetically sealed drive system, resistant stainless steel housing for easy and fast cleaning.

Accessories

[ASTEROID 40 - Stirring bar](#)
[Stirring bar remover PTFE](#)



MULTIPLE STIRRERS WITH INTERNAL CONTROL


Designed for reliable mass screenings as well as chemical, biotechnical and medical applications of all kinds, developed for the hard daily lab use and uncompromising continuous operation.

MIX 6 / MIX 15

Ultra-flat magnetic stirrer with 6 stirring positions, suitable for 6 x 1,000 ml Erlenmeyer flasks, or with 15 stirring positions, suitable for 15 x 250 ml beaker glasses (tall form).

- ⌘ Maintenance- and wear-free
- ⌘ For different vessel sizes
- ⌘ Outstanding long-life quality
- ⌘ Developed and made in Germany

magnetic motion

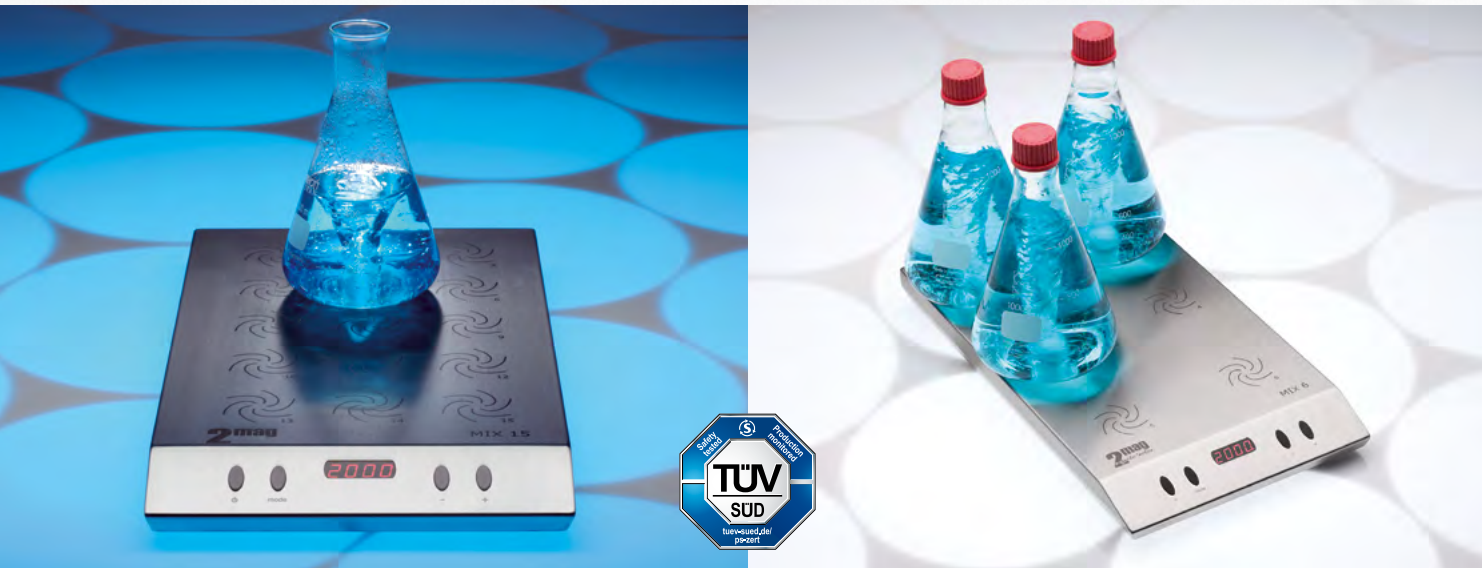

Type	MIX 6	MIX 15
Stirring points	6	15
Stirring point distance	130 mm	65 mm
Stirring volume/stirring point	1 - 3,000 ml	
Speed range	100 - 2,000 rpm	
Stirring power (max.)	20 W	
Power setting	5/10/15/20 W (4-step)	
Material housing	stainless steel	
Permitted operation conditions	-10 °C up to +50 °C (at 80% humidity)	
Electrical data	100-240 V / 50-60 Hz / 1.5 A	
Dimensions (WxDxH)	245 x 425 x 38 mm	
Protection category	IP65	
Weight (gross)	approx. 9.0 kg	
Order no.	30006	30015

3 years warranty on material and manufacturing.
We reserve the right to make technical alterations. We do not assume liability for errors in printing or typing.

6 or 15 stirring positions, 100% maintenance-free and wear-free by inductive 2mag-Magnetic-Drive concept, power reserves up to 3,000 ml stirring volume per stirring point, extremely wide speed range of 100 to 2,000 rpm, 100% synchronized speed, jerk-free stirring even at low speeds, 4-step power setting of the stirrer, high power setting for viscous liquids and reduced stirring power for long-term operation without any heating effects caused by the stirrer.

Clear digital display for settings of stirrer speed and power, SoftStart procedure for reliable catching/centering and safe acceleration of the stirring bar, QuickSet for quick setting of start- and maximum speed, Automatic memory function to save the last settings, outstanding long-life cycle of the hermetically sealed drive system, resistant stainless steel housing for easy and fast cleaning..

Accessories

ASTEROID 40 - Stirring bar
Stirring bar remover PTFE



MULTIPLE STIRRERS WITH INTERNAL CONTROL

Designed for chemical, biotechnical and medical applications of all kinds, developed for the daily lab use and continuous operation.

MIX 15 eco

Ultra flat, wear-free magnetic stirrer with 15 stirring positions, suitable for 15 x 250 ml beaker glasses (tall form).

- ⌘ Price-optimized, maintenance- and wear-free
- ⌘ For different vessel sizes
- ⌘ Developed and made in Germany

magnetic motion



Type	MIX 15 eco
Stirring points	15
Stirring point distance	65 mm
Stirring volume/stirring point	1 - 1,500 ml
Speed range	120 - 1,200 rpm
Stirring power (max.)	10 W
Power setting	-
Material housing	stainless steel
Permitted operation conditions	-10 °C up to +50 °C (at 80% humidity)
Electrical data	100-240 V / 50-60 Hz / 1.5 A
Dimensions (WxDxH)	245 x 425 x 38 mm
Protection category	IP65
Weight (gross)	approx. 9.0 kg
Order no.	30115

3 years warranty on material and manufacturing.
We reserve the right to make technical alterations. We do not assume liability for errors in printing or typing.

Price-optimized magnetic stirrer with 15 stirring positions, 100% maintenance-free and wear-free by inductive 2mag Magnetic-Drive concept for powerful mixing of solutions, power reserves up to 1,500 ml per stirring position, speed range from 120 up to 1,200 rpm, 100% synchronized speeds, jerk-free stirring even at low speeds.

Clear digital display for stirrer speed settings, SoftStart procedure for reliable catching/centering and safe acceleration of the stirring bar. Automatic memory function to save the last settings, outstanding long-life cycle of the hermetically sealed drive system, resistant stainless steel housing for easy and fast cleaning.

Accessories

ASTEROID 40 - Stirring bar
Stirring bar remover PTFE

